



ProGen™

Designed
for Life

WEST OAK | NATURAL | 270266021



ULTIMATE DURABILITY



ATTACHED PAD



PET FRIENDLY



EASY TO INSTALL



CLEANS EASILY



BEVELED EDGE

Waterproof

Safe to use in kitchens and bathrooms for modern looks throughout the home.

No Acclimation Required

ProGen may be used immediately. ProGen is extremely stable and has no temperature limitations, so it's great for 3-Season rooms.

Rigid Core

Overcomes subfloor imperfections and telegraphing, unlike traditional luxury vinyl tile.

Durable

Supports the everyday life of a busy, active household, like kids, pets, high heels and heavy furniture.

Easy Installation

ProGen does not require power tools and can be simply cut with a utility knife. Its fast-locking click system provides a low-cost, low-mess installation, even over existing floors.

No Transitions Required

ProGen is so stable, no transitions are required between rooms or in large spaces. However, Tarkett does offer matching transitions.

Quiet

IIC rating of 68 means superior sound absorption to drastically improve overall comfort.




Diamond W
A Tarkett Company


 **Tarkett**




Rock Maple
Medio
270264012




Stained Maple
Carmine
270264015



Vista Oak
Limed Natural
270265015



West Oak
Loft
270266022



West Oak
Drift
270266024




West Oak
Natural
270266021



Pacific Madrone
Natural
270266019




West Oak
Mountane
270266023



Villa Slate
Spire
270288001



Marble Nouveau
Ibis
270282006

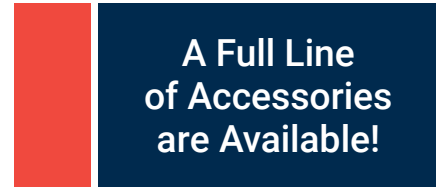

◆ Painted Bevel

SPECIFICATIONS					
Total Thickness	5 mm				
ProGen Core™ Technology	4 mm				
Acoustical Backing Layer	1 mm IXPE				
Wear Layer Thickness	20 mils				
Material	Phthalate Free, 100% Virgin Material				
Reusable Content	100% Reclaimable				
Plank Size	5' x 48"	7' x 48"	7' x 60"	9' x 24"	12' x 24"
Sq. Ft. per Carton	26.68 sq. ft.	28.52 sq. ft.	29.61 sq. ft.	20.96 sq. ft.	28.03 sq. ft.
Planks per Carton	16	12	10	14	14
Cartons per Pallet	56	50	40	64	54
Lbs. per Carton	42 lbs.	44 lbs.	45 lbs.	33.5 lbs.	45 lbs.
ASTM F2199 (Dimensional Stability)	Passes				
ASTM F1914 (Residual Indentation)	Passes (PSI Equivalent > 5,000 lbs.)				
ASTM F1514 (Heat Stability)	Passes				
ASTM F1515 (Light Stability)	Passes				
ASTM E2179 (Impact Sound Reductions)	$\Delta IIC \geq 20$ dB				
IIC Impact Sound Reduction Rating	68				
ASTM F925 (Resistance to Chemicals)	Passes				
ASTM D5116 (VOC Requirements)	Passes < 0.1 mg/m ³				
Scratch/Scuff/Abrasion Properties	Excellent				
Phillips Castor Chair @ 100 lbs.	Passes @ 25,000 cycles				
Installation System	Uniclic®				
Certification	FloorScore® Certification				
Residential Warranty	Lifetime				
Light Commercial Warranty	15-Year				
3-Seasons Warranty	10-Year				

