

 Diamond W



PATCHING



SELF-LEVELERS



PRIMERS



MOISTURE CONTROL



IN STOCK

Ardex Engineered Cements™
SURFACE PREPARATION



PATCHING COMPOUNDS




Feather Finish
(Gray)
FF10G

- True featheredge
- Install floor coverings in as little as 15 minutes
- Exceptional bond strength



Feather Finish XF
(Gray)
FFXF10G

- True featheredge
- Install floor coverings in as little as 15 minutes
- Caster wheel approved

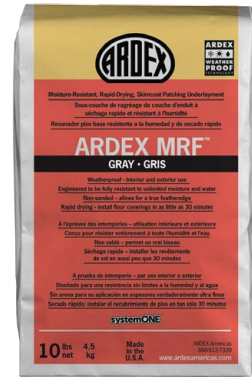

MRF
(Gray)
MRF10

- Engineered to withstand 100% RH
- Unlimited moisture and water
- Install floor coverings in as little as 30 minutes



SD-P RAPID
SDPRAPID

- Ideal for ramping, patching large areas and screeding
- Ready for floor covering in as little as 60 minutes
- No primer required over concrete

SELF-LEVELING UNDERLAYMENTS



K 15
K 15 55

- The original and most specified self-leveler in North America
- Install most floor covering after 16 hours



K 22 F
K22F50

- Excellent over challenging substrates
- Fiber reinforced
- Install most floor covering after 72 hours



V 1200
V1200 50

- Excellent flow and heal properties
- Install most floor covering after 24 hours



V 1000
V1000 50

- Can be tapered to meet existing elevations
- Install most floor covering after 24 hours

PRIMERS



P 4

P4-1 (1 gal)
P4-3.5 (3.5 gal)

- Pre-mixed, ready to use
- Dries in as little as 30 minutes



P 51

P51-1 (1 gal)
P51-4 (4 gal)

- Solvent-free primer
- Seals the substrate

CRACK & JOINT REPAIR




ARDIFIX

ARDIFIX (21.2 oz tube)

- Two-part polyurethane with extremely low viscosity for deep penetration
- Ideal for cracks and saw-cuts prior to moisture control, underlayments, and toppings
- Interior or exterior use

MOISTURE CONTROL

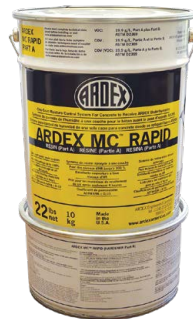

MC RAPID

MCRAPID A&B

- One-coat epoxy resin system
- Ready to prime in 4 hours
- For RH up to 100%



VB 100

VB-100-5

- Fast drying, install underlayments in as little as 60 minutes after the second coat
- Reduces moisture vapor emissions in concrete
- For RH up to 100%




800-523-6265

commercialorders@diamondw.com

ARDEX AMERICAS | Self-Leveling Underlayments

Product Selection Chart		
ARDEX K 15®	●	Over concrete
	●	Over ceramic tile and terrazzo
	●	Over non-water-soluble adhesive residue
	●	Well bonded VCT
ARDEX V 1200™	●	Epoxy Coating Systems
	●	Metal
	●	Over wood
	●	Over gypsum
ARDEX V 1000™	●	Primer, Mechanical Prep
	●	Pumpable
	●	On/Above/Below Grade
	●	Portland Cement-Based
ARDEX K 22 F™	●	Cement Hybrid
	●	Can be tapered
	●	Mix with water only
	●	Two Component
		Maximum thickness neat
		With aggregate
		Hours to walk on
		Hours to install moisture insensitive tile & stone
		Hours to install most flooring
		Compressive strength (ASTM C109 Modified) at 28 days
		Coverage
		RH Limit

ARDEX AMERICAS | Non-Structural Patching Compounds

		
ARDEX FEATHER FINISH®	●	Exterior
	●	Trowel
	●	Pour
	●	Concrete
ARDEX FEATHER FINISH® XF™	●	Wood
	●	Masonry
	●	Terrazzo
	●	Ceramic Tile
ARDEX MRF™	●	Quarry Tile
	●	Adhesive Residues
	●	True Feather Edge
	●	Minimum
ARDEX SD-P® RAPID	●	Maximum
	●	Walk on
	●	Install Floor Covering
	●	Coverage/Bag
		CHOOSE...
		RH Limit