




Barrington

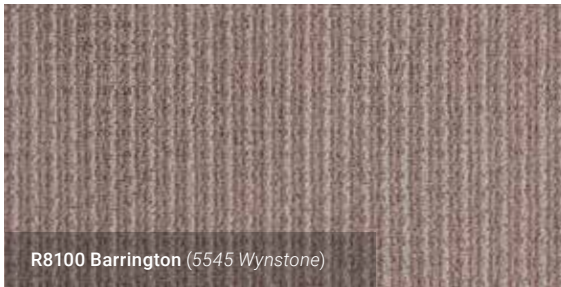

R8100 Barrington (5545 Wynstone)

PRODUCT SPECIFICATIONS

| | |
|------------------------|--|
| Style #: | R8100 |
| Colors: | 6 |
| Fiber: | 100% Solution Dyed Primus® PET Continuous Filament, Non-fuzzing Fiber |
| Gauge: | 1/10 Gauge - High Gauge Construction |
| Protection: | Standard Built-In Soil and Stain Protection |
| Pile Weight: | 26 oz. |
| Pattern Repeat: | 0.6" x 0.75" |
| Width: | 12' |

COLORS

| | |
|-----------------|------------------|
| 5525 Wey Bridge | 5565 Grey Stone |
| 5575 Hillburn | 5545 Wynstone |
| 5585 Oak Grove | 5535 Still Water |

WARRANTY



STAIN



PET URINE



SOIL



ABRASIVE WEAR



TEXTURE
RETENTION



MANUFACTURING
DEFECTS



New variegated colorations are added to Crystal Bay's classic shades in Barrington. Six different styles offer a tight construction with tonal variations that work well in multiple settings. Made of 100% solution dyed Primus PET Fiber.

Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211
www.tarkettna.com



Barrington

PRODUCT SPECIFICATIONS

| | |
|--------------------|--------------------------------------|
| Style | R8100 |
| Construction | Textured Loop |
| Fiber | 100% Solution-dyed Primus® PET Fiber |
| Twist Level | 4.91 TPI |
| Gauge | 1/10 |
| Tufted Pile Weight | 26 oz. / sq. yd. |
| Pile Height | 0.250" Medium / 0.125" Low |
| Stitches Per Inch | 10 |
| Primary Backing | Woven Polypropylene |
| Secondary Backing | Actionbac® |
| Dye | Solution-dyed |
| Total Weight | 62 oz. |
| Density | 4193 |
| Width | 12' |
| Pattern Repeat | 0.6"W x 0.75"L |

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad. **Stretch-In Installation:** Establish roll sequencing, dry lay carpet, and apply latex seam sealer to both edges. Pre-stretch the sections with shorter pattern measurements to align with longer patterns in order to make hot melt seam (**use 6" tape to prevent seam peaking**). A two-headed power stretcher or "deadman" must be used to achieve this. Once the seam is made, proceed with proper stretch installation (CRI-104, figure "Stretch Diagram"). The use of architectural or double tackless strip is required to be used throughout a stretch-in installation.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. **IT IS NOT A CARPET DEFECT**, but is inherent in solution-dyed graphic and cut/loop patterns.

All specifications subject to normal manufacturing tolerance.

Tarkett North America


285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com

©Tarkett USA Inc. 10/2019



Beaumont

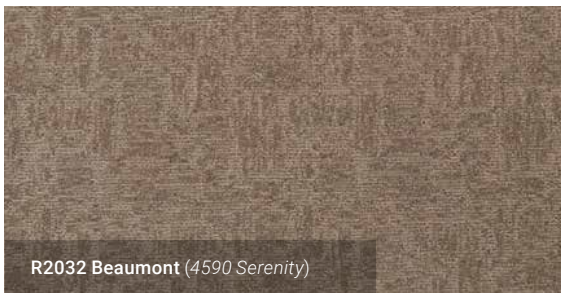

R2032 Beaumont (4590 Serenity)

Sophisticated and enduring, Beaumont offers a background that will serve equally well for traditional or contemporary styling. Available in 8 stunning colors that bring a dimensional texture softened with beautiful color, Beaumont is constructed of 100% solution dyed Primus PET Fiber.

PRODUCT SPECIFICATIONS

| | |
|------------------------|---|
| Style #: | R2032 |
| Colors: | 8 |
| Fiber: | 100% Solution Dyed Primus® PET Continuous Filament, Non-fuzzing Fiber |
| Gauge: | 1/10 Gauge - High Gauge Construction |
| Protection: | Standard Built-In Soil and Stain Protection |
| Pile Weight: | 26 oz. |
| Pattern Repeat: | 12" x 15.5" |
| Width: | 12' |

COLORS

| | |
|-----------------|------------------|
| 3538 Granite | 4180 Tranquility |
| 3584 Driftscape | 4185 Essential |
| 3788 Sand Dunes | 4583 Sandstone |
| 4171 Haylo | 4590 Serenity |

WARRANTY



STAIN



PET URINE



SOIL



ABRASIVE WEAR



TEXTURE RETENTION



MANUFACTURING DEFECTS



Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com



Beaumont

PRODUCT SPECIFICATIONS

| | |
|--------------------|--------------------------------------|
| Style | R2032 |
| Construction | Multicolor Level Cut Loop |
| Fiber | 100% Solution-dyed Primus® PET Fiber |
| Twist Level | 4.91 TPI |
| Gauge | 1/10 |
| Tufted Pile Weight | 26 oz. / sq. yd. |
| Pile Height | 0.312" Cut / 0.250" Loop |
| Stitches Per Inch | 9 |
| Primary Backing | Woven Polypropylene |
| Secondary Backing | Actionbac® |
| Dye | Solution-dyed |
| Total Weight | 62 oz. |
| Density | 3000 |
| Width | 12' |
| Pattern Repeat | 12"W x 15.5"L |

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad. **Stretch-In Installation:** Establish roll sequencing, dry lay carpet, and apply latex seam sealer to both edges. Pre-stretch the sections with shorter pattern measurements to align with longer patterns in order to make hot melt seam (**use 6" tape to prevent seam peaking**). A two-headed power stretcher or "deadman" must be used to achieve this. Once the seam is made, proceed with proper stretch installation (CRI-104, figure "Stretch Diagram"). The use of architectural or double tackless strip is required to be used throughout a stretch-in installation.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. **IT IS NOT A CARPET DEFECT**, but is inherent in solution-dyed graphic and cut/loop patterns.

All specifications subject to normal manufacturing tolerance.

Tarkett North America


285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com

©Tarkett USA Inc. 10/2019



Crystal Bay

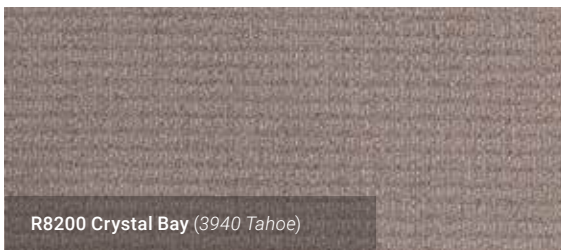

R8200 Crystal Bay (3940 Tahoe)

The fine, tightly constructed texture of Crystal Bay provides a more formal tone throughout the room. Offered in six (6) traditional colors and constructed of 100% solution dyed Primus PET Fiber, it's ideal for settings requiring a quiet, understated backdrop.

PRODUCT SPECIFICATIONS

| | |
|------------------------|---|
| Style #: | R8200 |
| Colors: | 6 |
| Fiber: | 100% Solution Dyed Primus® PET Continuous Filament, Non-fuzzing Fiber |
| Gauge: | 1/10 Gauge - High Gauge Construction |
| Protection: | Standard Built-In Soil and Stain Protection |
| Pile Weight: | 26 oz. |
| Pattern Repeat: | 0.6" x 0.75" |
| Width: | 12' |

COLORS

| | |
|-----------------|-----------------|
| 3542 Alder | 3850 Southwood |
| 3670 Silvertip | 3940 Tahoe |
| 3788 Sand Dunes | 4560 North Lake |

WARRANTY



STAIN



PET URINE



SOIL



ABRASIVE WEAR



TEXTURE RETENTION



MANUFACTURING DEFECTS



Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com



Crystal Bay

PRODUCT SPECIFICATIONS

| | |
|--------------------|--------------------------------------|
| Style | R8200 |
| Construction | Textured Loop |
| Fiber | 100% Solution-dyed Primus® PET Fiber |
| Twist Level | 4.91 TPI |
| Gauge | 1/10 |
| Tufted Pile Weight | 26 oz. / sq. yd. |
| Pile Height | 0.250" Medium / 0.125" Low |
| Stitches Per Inch | 10 |
| Primary Backing | Woven Polypropylene |
| Secondary Backing | Actionbac® |
| Dye | Solution-dyed |
| Total Weight | 62 oz. |
| Density | 4193 |
| Width | 12' |
| Pattern Repeat | 0.6"W x 0.75"L |

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad. **Stretch-In Installation:** Establish roll sequencing, dry lay carpet, and apply latex seam sealer to both edges. Pre-stretch the sections with shorter pattern measurements to align with longer patterns in order to make hot melt seam (**use 6" tape to prevent seam peaking**). A two-headed power stretcher or "deadman" must be used to achieve this. Once the seam is made, proceed with proper stretch installation (CRI-104, figure "Stretch Diagram"). The use of architectural or double tackless strip is required to be used throughout a stretch-in installation.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. **IT IS NOT A CARPET DEFECT**, but is inherent in solution-dyed graphic and cut/loop patterns.

All specifications subject to normal manufacturing tolerance.

Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com

©Tarkett USA Inc. 10/2019



Del Rio



Quiet earth tone colorations make the pebble mosaic pathways etched into Del Rio stand out beautifully. Constructed of 100% solution dyed Primus PET Fiber, Del Rio is available in six (6) soft shades for an instantly warm traditional feel.

PRODUCT SPECIFICATIONS

| | |
|------------------------|---|
| Style #: | R6200 |
| Colors: | 6 |
| Fiber: | 100% Solution Dyed Primus® PET Continuous Filament, Non-fuzzing Fiber |
| Gauge: | 1/10 Gauge - High Gauge Construction |
| Protection: | Standard Built-In Soil and Stain Protection |
| Pile Weight: | 26 oz. |
| Pattern Repeat: | 2" x 2.75" |
| Width: | 12' |

COLORS

| | |
|------------------|-------------------|
| 103 Vanilla | 329 Antique Beige |
| 304 Neutrino | 331 Seashell |
| 328 Basket Beige | 808 Slate |

WARRANTY



STAIN



PET URINE



SOIL



ABRASIVE WEAR



TEXTURE RETENTION



MANUFACTURING DEFECTS



Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com



Del Rio

PRODUCT SPECIFICATIONS

| | |
|--------------------|--------------------------------------|
| Style | R6200 |
| Construction | Level Cut Loop |
| Fiber | 100% Solution-dyed Primus® PET Fiber |
| Twist Level | 4.91 TPI |
| Gauge | 1/10 |
| Tufted Pile Weight | 26 oz. / sq. yd. |
| Pile Height | 0.312" Cut / 0.250" Loop |
| Stitches Per Inch | 10 |
| Primary Backing | Woven Polypropylene |
| Secondary Backing | Actionbac® |
| Dye | Solution-dyed |
| Total Weight | 62 oz. |
| Density | 3000 |
| Width | 12' |
| Pattern Repeat | 2"W x 2.75"L |

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad. **Stretch-In Installation:** Establish roll sequencing, dry lay carpet, and apply latex seam sealer to both edges. Pre-stretch the sections with shorter pattern measurements to align with longer patterns in order to make hot melt seam (**use 6" tape to prevent seam peaking**). A two-headed power stretcher or "deadman" must be used to achieve this. Once the seam is made, proceed with proper stretch installation (CRI-104, figure "Stretch Diagram"). The use of architectural or double tackless strip is required to be used throughout a stretch-in installation.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. **IT IS NOT A CARPET DEFECT**, but is inherent in solution-dyed graphic and cut/loop patterns.

All specifications subject to normal manufacturing tolerance.

Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com

©Tarkett USA Inc. 10/2019



Key West



R3035 Key West (305 River Rock)

This classic solid-color pin dot offers extra quality, as well as extra value, with traditional charm and more affordability than many lookalikes. Available in seven (7) classic colorways, Key West is constructed of 100% solution dyed Primus PET Fiber.

PRODUCT SPECIFICATIONS

| | |
|------------------------|---|
| Style #: | R3035 |
| Colors: | 7 |
| Fiber: | 100% Solution Dyed Primus® PET Continuous Filament, Non-fuzzing Fiber |
| Gauge: | 1/10 Gauge - High Gauge Construction |
| Protection: | Standard Built-In Soil and Stain Protection |
| Pile Weight: | 24 oz. |
| Pattern Repeat: | 6" x 1.5" |
| Width: | 12' |

COLORS

| | |
|----------------|-------------------|
| 103 Vanilla | 328 Basket Beige |
| 304 Neutrino | 330 Relaxed Khaki |
| 305 River Rock | 808 Slate |
| 307 Light Dusk | |

WARRANTY



STAIN



PET URINE



SOIL



ABRASIVE WEAR



TEXTURE RETENTION



MANUFACTURING DEFECTS



Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com



Key West

PRODUCT SPECIFICATIONS

| | |
|--------------------|--------------------------------------|
| Style | R3035 |
| Construction | Level Cut Loop |
| Fiber | 100% Solution-dyed Primus® PET Fiber |
| Twist Level | 4.91 TPI |
| Gauge | 1/10 |
| Tufted Pile Weight | 26 oz. / sq. yd. |
| Pile Height | 0.312" Cut / 0.250" Loop |
| Stitches Per Inch | 9 |
| Primary Backing | Woven Polypropylene |
| Secondary Backing | Actionbac® |
| Dye | Solution-dyed |
| Total Weight | 62 oz. |
| Density | 3000 |
| Width | 12' |
| Pattern Repeat | 6"W x 1.5"L |

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad. **Stretch-In Installation:** Establish roll sequencing, dry lay carpet, and apply latex seam sealer to both edges. Pre-stretch the sections with shorter pattern measurements to align with longer patterns in order to make hot melt seam (**use 6" tape to prevent seam peaking**). A two-headed power stretcher or "deadman" must be used to achieve this. Once the seam is made, proceed with proper stretch installation (CRI-104, figure "Stretch Diagram"). The use of architectural or double tackless strip is required to be used throughout a stretch-in installation.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. **IT IS NOT A CARPET DEFECT**, but is inherent in solution-dyed graphic and cut/loop patterns.

All specifications subject to normal manufacturing tolerance.

Tarkett North America


285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com

©Tarkett USA Inc. 10/2019



Pacific Heights

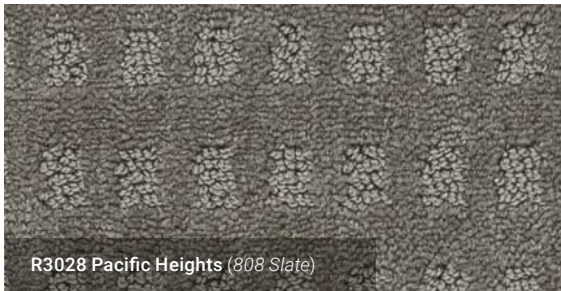

R3028 Pacific Heights (808 Slate)

Pacific Heights perfects the rich LCL look with its classic geometric sculptured appeal. At a wonderfully affordable price, Pacific Heights is constructed of 100% solution dyed Primus PET Fiber, and is available in seven (7) classic colorways.

PRODUCT SPECIFICATIONS

| | |
|------------------------|--|
| Style #: | R3028 |
| Colors: | 7 |
| Fiber: | 100% Solution Dyed Primus® PET Continuous Filament, Non-fuzzing Fiber |
| Gauge: | 1/10 Gauge - High Gauge Construction |
| Protection: | Standard Built-In Soil and Stain Protection |
| Pile Weight: | 26 oz. |
| Pattern Repeat: | 0.9" x 1.5" |
| Width: | 12' |

COLORS

| | |
|----------------|-------------------|
| 103 Vanilla | 328 Basket Beige |
| 304 Neutrino | 330 Relaxed Khaki |
| 305 River Rock | 808 Slate |
| 307 Light Dusk | |

WARRANTY



STAIN



PET URINE



SOIL



ABRASIVE WEAR



TEXTURE
RETENTION



MANUFACTURING
DEFECTS



Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com



Pacific Heights

PRODUCT SPECIFICATIONS

| | |
|--------------------|--------------------------------------|
| Style | R3028 |
| Construction | Level Cut Loop |
| Fiber | 100% Solution-dyed Primus® PET Fiber |
| Twist Level | 4.91 TPI |
| Gauge | 1/10 |
| Tufted Pile Weight | 26 oz. / sq. yd. |
| Pile Height | 0.312" Cut / 0.250" Loop |
| Stitches Per Inch | 9 |
| Primary Backing | Woven Polypropylene |
| Secondary Backing | Actionbac® |
| Dye | Solution-dyed |
| Total Weight | 62 oz. |
| Density | 3000 |
| Width | 12' |
| Pattern Repeat | 0.9"W x 1.5"L |

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad. **Stretch-In Installation:** Establish roll sequencing, dry lay carpet, and apply latex seam sealer to both edges. Pre-stretch the sections with shorter pattern measurements to align with longer patterns in order to make hot melt seam (**use 6" tape to prevent seam peaking**). A two-headed power stretcher or "deadman" must be used to achieve this. Once the seam is made, proceed with proper stretch installation (CRI-104, figure "Stretch Diagram"). The use of architectural or double tackless strip is required to be used throughout a stretch-in installation.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. **IT IS NOT A CARPET DEFECT**, but is inherent in solution-dyed graphic and cut/loop patterns.

All specifications subject to normal manufacturing tolerance.

Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com

©Tarkett USA Inc. 10/2019



Tucson



R3032 Tucson (3584 Driftscape)

A more economical rendition of Sedona, Tucson offers eye-catching textural charm through a striated cut/loop construction. Tucson is crafted of 100% solution dyed Primus PET Fiber, and is available in eight (8) top-selling multicolored neutrals.

PRODUCT SPECIFICATIONS

| | |
|------------------------|---|
| Style #: | R3032 |
| Colors: | 8 |
| Fiber: | 100% Solution Dyed Primus® PET Continuous Filament, Non-fuzzing Fiber |
| Gauge: | 1/10 Gauge - High Gauge Construction |
| Protection: | Standard Built-In Soil and Stain Protection |
| Pile Weight: | 26 oz. |
| Pattern Repeat: | 12" x 15" |
| Width: | 12' |

COLORS

| | |
|-----------------|------------------|
| 3538 Granite | 4180 Tranquility |
| 3584 Driftscape | 4185 Essential |
| 3788 Sand Dunes | 4583 Sandstone |
| 4171 Haylo | 4590 Serenity |

WARRANTY



STAIN



PET URINE



SOIL



ABRASIVE WEAR



TEXTURE RETENTION



MANUFACTURING DEFECTS



Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com



Tucson

PRODUCT SPECIFICATIONS

| | |
|--------------------|--------------------------------------|
| Style | R3032 |
| Construction | Multicolor Level Cut Loop |
| Fiber | 100% Solution-dyed Primus® PET Fiber |
| Twist Level | 4.91 TPI |
| Gauge | 1/10 |
| Tufted Pile Weight | 26 oz. / sq. yd. |
| Pile Height | 0.312" Cut / 0.250" Loop |
| Stitches Per Inch | 9 |
| Primary Backing | Woven Polypropylene |
| Secondary Backing | Actionbac® |
| Dye | Solution-dyed |
| Total Weight | 62 oz. |
| Density | 3000 |
| Width | 12' |
| Pattern Repeat | 12"W x 15"L |

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad. **Stretch-In Installation:** Establish roll sequencing, dry lay carpet, and apply latex seam sealer to both edges. Pre-stretch the sections with shorter pattern measurements to align with longer patterns in order to make hot melt seam (**use 6" tape to prevent seam peaking**). A two-headed power stretcher or "deadman" must be used to achieve this. Once the seam is made, proceed with proper stretch installation (CRI-104, figure "Stretch Diagram"). The use of architectural or double tackless strip is required to be used throughout a stretch-in installation.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. **IT IS NOT A CARPET DEFECT**, but is inherent in solution-dyed graphic and cut/loop patterns.

All specifications subject to normal manufacturing tolerance.

Tarkett North America

285 Kraft Drive
Dalton, GA 30721
USA: 800-871-3211

www.tarkettna.com

©Tarkett USA Inc. 10/2019