


 Diamond W



GENIEMAT® RST

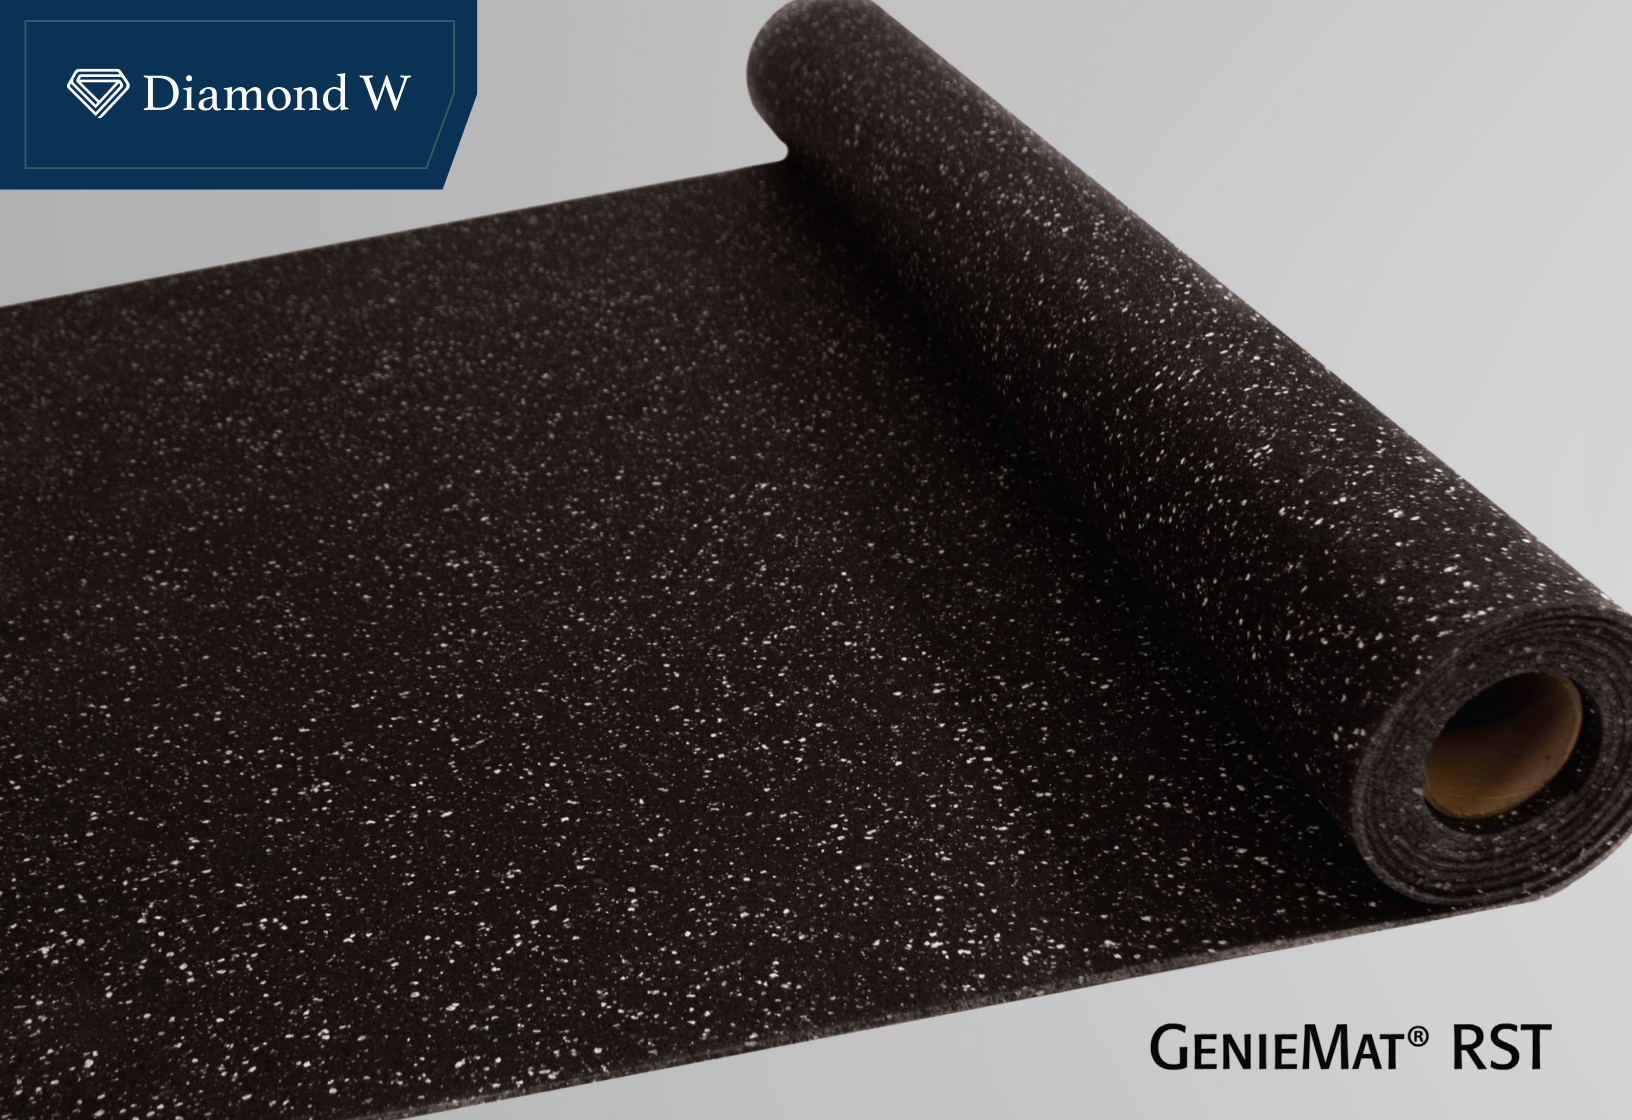

ONE-STEP SOUND CONTROL

- For superior sound control in multi-family housing, high-rises, or commercial buildings
- Engineered for direct adhered floor coverings such as wood and vinyl
- Mold, bacteria, fungi and water resistant



94% RECYCLED RUBBER

- Complete floor covering system warranty available
- Meets VOC emission requirements
- Suitable for any hard surface floor finish in concrete and wood frame construction



MADE IN NORTH AMERICA



IN STOCK

GenieMat® RST
SOUND CONTROL UNDERLAYMENT



	RST02	RST05	RST10	PMI06
	2mm	5mm	10mm	Perimeter Isolation Strip
Roll Size	4 x 75	4 x 30	4 x 15	0.25" x 3" x 50'
Per Roll	300 ft ²	120 ft ²	60 ft ²	50 LF
Floor Coverings	wood, vinyl, tile, stone			
Construction	concrete, wood frame			

	Luxury Vinyl Plank 		Hardwood 	
	LVP		Wood	
	STC*	IIC*	STC*	IIC*
Bare 6" Slab	51	52	52	53
Bare 8" Slab	54	57	55	56
6" Slab w/Ceiling	61	63	63	65
OWT	62	60	59	59
TJI	61	60	58	61
4" Metal Pan Deck	54	54	55	54

* Pliteq engineer to confirm exact ratings for project specific floor-ceiling assembly.

Recommended Adhesives		
Wood		LVT/LVP/Carpet Tile
- Bostik's BEST®	- DriTac 7900 Super Grab	- Bostik LOCKA499 PSA™
- Bostik BST™	- DriTac 4141 Golden Bullet	- Bostik LOCKA799 Transitional™
- Bostik EFA+™	- DriTac 7700 Easy Clean	- DriTac 5900 MegaBond
- DriTac 7300 SureBond	- DriTac 7800 Supreme Green	